



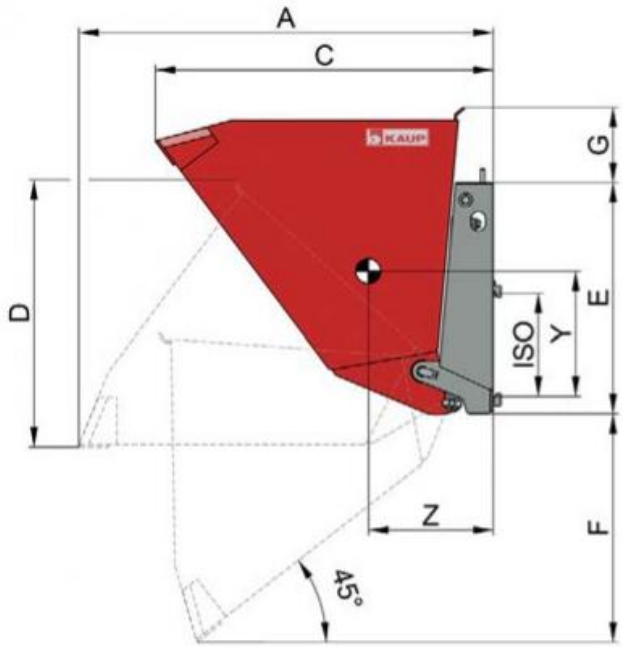

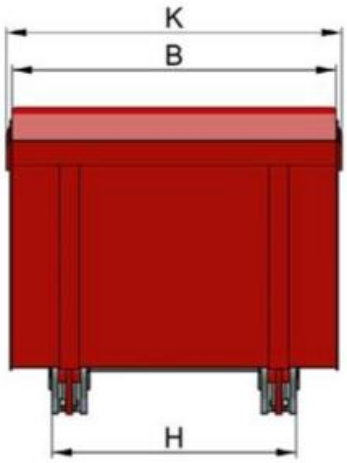

T184

Loading Bucket T184

Loose goods such as sand, gravel, coal, grain, fertilizer, cement, clay, concrete etc. can be transported with the Loading Bucket (see approx. specific weights in table below). The Loading Bucket is tilted forward to the ground by means of hydraulic cylinders.

Important: ensure that **the Loading Bucket is at least 200 mm wider** than the forklift truck width, measured over the front axle, so that the wheels do not touch the goods to be scooped up.

Model	Capacity kg	Cubic Capacity Loose goods m^3	Water m^3	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	ISO cl.	CofG LCD mm	CofG Z mm	$CofG_V$ Y mm	Weight kg
	Loose weight to 2.200 kg/m^3																
2T 184.2	1.760	0,8	0,7	1.610	1.300	1.245	955	925	805	280	980	1.346	2/3	830	515	420	530
2T 184.2	2.200	1,0	0,9	1.610	1.650	1.245	955	925	805	280	980	1.696	2/3	830	525	435	590
2T 184.2	2.420	1,1	1,0	1.610	1.800	1.245	955	925	805	280	980	1.846	2/3	830	530	445	615
	Loose weight to 2.200 kg/m^3																
3T 184.4	2.420	1,1	0,9	1.660	1.300	1.350	1.070	925	915	300	980	1.346	2/3	830	463	504	560
3T 184.4	2.640	1,2	1,0	1.660	1.500	1.350	1.070	925	915	300	980	1.546	2/3	830	474	508	594
3T 184.4	2.860	1,3	1,1	1.660	1.650	1.350	1.070	925	915	300	980	1.696	2/3	830	481	511	620
3T 184.4	3.080	1,4	1,2	1.660	1.800	1.350	1.070	925	915	300	980	1.846	2/3	830	487	514	646
	Loose weight to 2.500 kg/m^3																
4T 184.1	5.000	2,0	1,4	1.780	2.000	1.410	1.135	1.230	810	210	1.004	2.046	3/4	890	548	561	835
	Loose weight to 2.200 kg/m^3																
6T 184.4	6.600	3,0	2,4	2.250	2.400	1.990	1.370	1.265	1.190	245	1.143	2.484	4	1.125	700	595	1.620
6T 184.4	7.920	3,6	2,8	2.250	2.800	1.990	1.370	1.265	1.190	245	1.143	2.884	4	1.125	720	603	1.730

A few specific weights of loads (kg/m^3)

coal.....700
grain, pulses 750
potatoes, turnips 750
wet pit coal 1.000
fertilizer 1.200
powder cement, unpacked 1.800
sand, wet gravel..... 2.000
mud, clay 2.100
Thomasmeal 2.200
concrete 2.200